



GCP-30 Series

Genset Control Package Mains & Generator Protection & Control

APPLICATIONS

The GCP-30 Series genset control is designed to provide total control for medium sized to big applications with multiple gensets.

A network of the compact, versatile GPC-30 controls is capable of controlling up to eight gensets with automatic sequencing.

Load management features include automatic base/peak shaving, import/export control and emergency power/back up power generation.

The GCP-31 has logic for one, the GCP-32 has logic for two circuit breakers including open/closed transition.

DESCRIPTION

Features

- True RMS 8x voltage (gen/bus/mains)
- True RMS 4x current (gen/mains)
- Start/stop logic for Diesel/Gas engines
- Engine pre-glow or purge control
- Battery voltage monitoring
- Speed control with overspeed monitoring
- kWh/oper.hours/start/maintenance counter
- Load dependent start/stop
- Configurable trip/control set points
- Configurable delays for each protection
- Magnetic/switching Pickup input
- 16 configurable discrete alarm inputs
- 7 configurable/programmable relays
- Two-line LC display
- Synchroscope
- Push-buttons for direct control
- CAN bus communication
- Multi level password protection

DESCRIPTION (continued)

Protection ANSI

Mains

- Over-/undervoltage (59/27)
- Over-/underfrequency (81O/U)
- Phase/vector shift (78)

Generator

- Over-/undervoltage (59/27)
- Over-/underfrequency (81O/U)
- Overload (32)
- Reverse/reduced power (32R/F)
- Load imbalance (46)
- Time-overcurrent (TOC) (50)

Controller (all versions)

- Speed/frequency/real power
- Voltage/power factor cosphi
- Mains import/export power
- Load/var sharing (up to 8 units)

Controller (GCP-31)

Synchronizer for 1 CB

- Isolated operation
- Mains parallel operation
- Softloading

Controller (GCP-32)

Synchronizer for 2 CB

- AMF automatic mains failure
- Isolated operation
- Open transition (break-before-make)
- Closed transition (make-before-break)
- Mains parallel operation

Special (Version dependent)

- 2 config. analog outputs (0/4..20 mA)
- Active power setpoint (0/4..20 mA)
- Discrete raise/lower for n/f/U/P/Q
- Analog raise/lower for n/f/U/P/Q
- PWM raise/lower for n/f/P
- 3/6 conf. analog measuring inputs (0/4..20 mA, Pt100, VDO)
- Event recorder with real time clock





- AMF auto start/stop
- Complete engine, generator, and mains protection and controller into one unit
- True RMS sensing
- Synchronization for one/two breakers
- Load management-automatic base load/peak shaving, import/export power control, automatic sequencing
- Load/var sharing
- Counters for kWh, engine starts, operating hours, maintenance call
- Freely configurable discrete and analog alarm inputs
- Freely configurable relay and analog outputs
- PC and front panel configurable
- CAN bus based communication
- UL/cUL Listed

SPECIFICATIONS

Accuracy.....Class 1
 Power supply.....12/24 Vdc (9.5..32 Vdc)
 Intrinsic consumptionmax. 15 W
 Ambient temperature.....-20..70 °C
 Ambient humidity.....95 %, non-condensing
Voltage Rated: [1] 57/100(120) Vac ... or [4] 230/400 Vac
 UL: [1] max. 150 Vac or [4] max. 300 Vac
 Setting range: [1] 50..125 Vac or [4] 200..440 Vac
 Measuring frequency.....50/60 Hz (40..70 Hz)
 Linear measuring range up to1.3xUn
 Input resistance.....[1] 0.21 MΩ, [4] 0.7 MΩ
 Max. power consumption per path< 0.15 W
Current[#].....[./1] ./1 A or [./5] ./5 A
 Current-carrying capacityIgen = 3.0xIn
 Imains = 1.5xIn
 Load< 0.15 VA
 Rated short-time current (1 s)[./1] 50xIn, [./5] 10xIn
Discrete inputs.....metallically separated
 Input range12/24 Vdc (4..40 Vdc)
 Input resistance.....approx. 6.7 kΩ

Relay outputs.....metallically separated
 Contact materialAgCdO
 Load (GP).....24 Vdc@2 Adc, 250 Vac@2 Aac
 Pilot duty (PD).....24 Vdc@1 Adc
Analog input[#].....freely scaleable
 Type0/4..20 mA, Pt100, VDO
 Resolution10 Bit
Analog output.....metallically separated
 Type0/4..20 mA, freely scaleable
 Resolution8/12 Bit (depending on model)
 Max. load 0/4..20 mA500 Ω
 Insulating voltage3,000 Vdc
Housing.....Type APRANORM DIN 43 700
 Dimensions.....144x144x118 mm
 Front cutout138x136 mm
 Connectionscrew/plug terminals depending
 on connector 1.5 mm² or 2.5 mm²
 Frontinsulating surface
 Protection system.....IP 21
 Weightdepending on version, approx. 1,000 g
Disturbance test (CE).....tested according to
 applicable EN guidelines
Listings.....UL/cUL listed (voltages up to 300 Vac)
 for ordinary loc., file E212970


DIMENSIONS

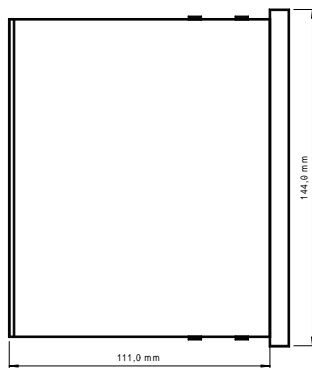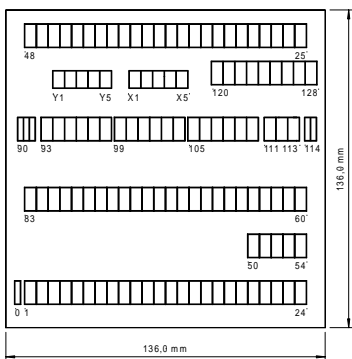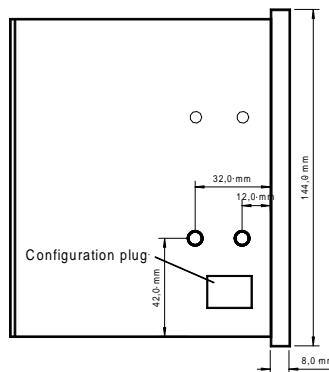


2002-11-21 | GCP30-AMG2 Dimensions g2ww-4702-ab.skf

APPLICATIONS

Typical application for the GCP-32
 (GCP-31 same but without MCB)

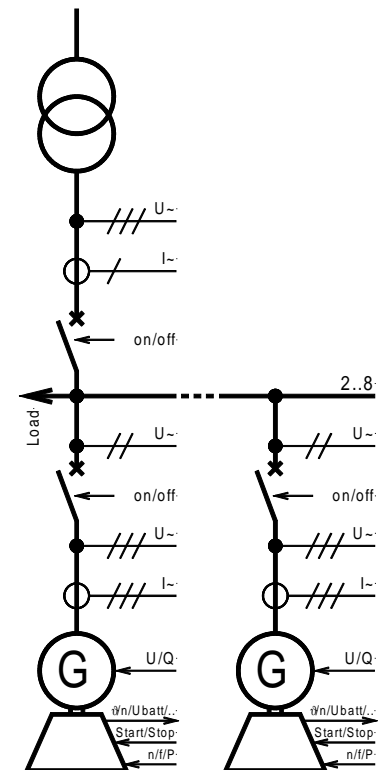

WIRING DIAGRAM (GCP-31 upon request)

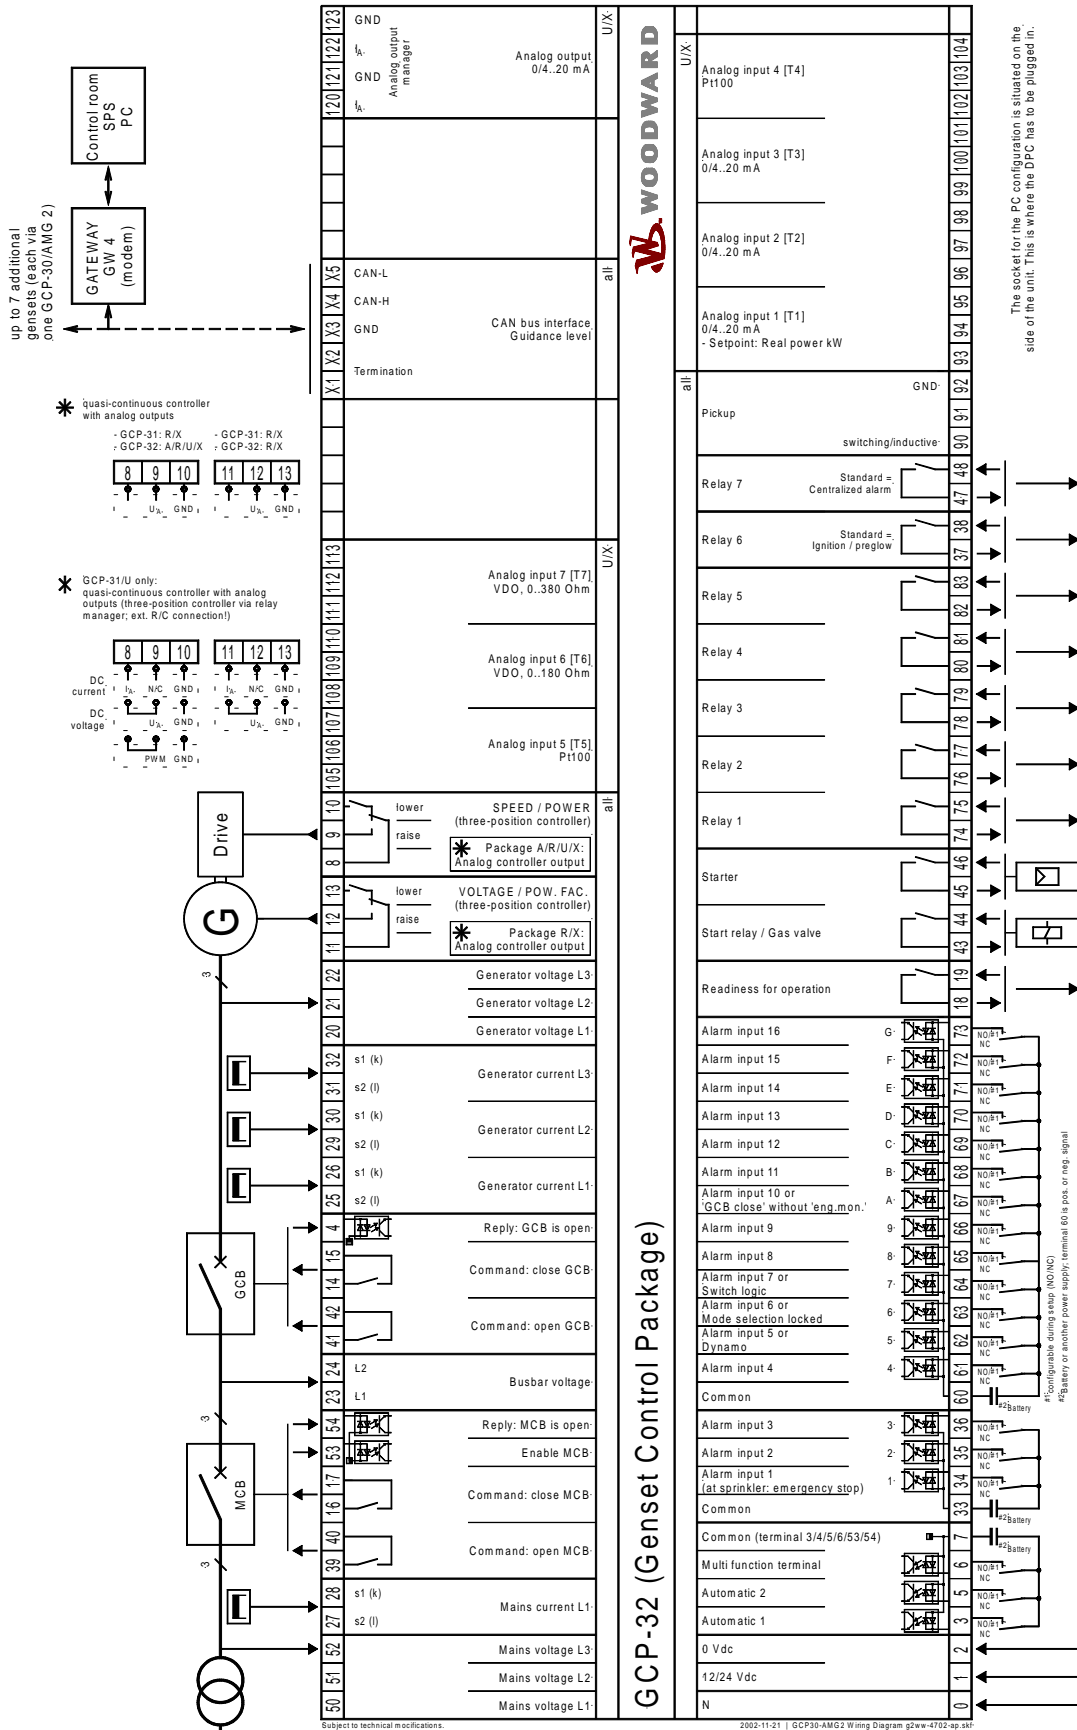

Subject to technical modifications.

Woodward Industrial Controls
 PO Box 1519
 Fort Collins CO, USA
 80522-1519
 1000 East Drake Road
 Fort Collins CO 80525
 Ph: +1 (970) 482-5811
 Fax: +1 (970) 498-3058

Distributors & Service
 Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

Corporate Headquarters
 Rockford IL, USA
 Ph: +1 (815) 877-7441

www.woodward.com

FEATURES OVERVIEW

Package	GCP-31				GCP-32			
	A	R	U	X	A	R	U	X
Control								
Breaker control logic	1	1	1	1	2	2	2	2
Synchronization	✓	✓	✓	✓	✓	✓	✓	✓
Isolated single-unit operation	✓	✓	✓	✓	✓	✓	✓	✓
AMF (auto mains failure operation)	✓	✓	✓	✓	✓	✓	✓	✓
Stand-by operation	✓	✓	✓	✓	✓	✓	✓	✓
CHP operation	✓	✓	✓	✓	✓	✓	✓	✓
Peak load op. (auto start/stop)	✓	✓	✓	✓	✓	✓	✓	✓
Mains parallel operation	✓	✓	✓	✓	✓	✓	✓	✓
Open transition (break-before-make)	✓	✓	✓	✓	✓	✓	✓	✓
Closed transition (make-before-break)	✓	✓	✓	✓	✓	✓	✓	✓
Softloading	✓ #1	✓ #1	✓ #1	✓ #1	✓	✓	✓	✓
Accessories								
Start/stop logic for Diesel/Gas engines	✓	✓	✓	✓	✓	✓	✓	✓
kWh counter	✓	✓	✓	✓	✓	✓	✓	✓
Operating hours/start/maintenance counter	✓	✓	✓	✓	✓	✓	✓	✓
Configuration via PC #2	✓	✓	✓	✓	✓	✓	✓	✓
Event recorder, real time clock			50	50			50	50
Protection								
Generator: voltage/frequency	✓	✓	✓	✓	✓	✓	✓	✓
Mains: volt./freq./phase shift	✓	✓	✓	✓	✓	✓	✓	✓
Generator: overload	✓	✓	✓	✓	✓	✓	✓	✓
Generator: reverse power	✓	✓	✓	✓	✓	✓	✓	✓
Generator: reduced power	✓	✓	✓	✓	✓	✓	✓	✓
Generator: load imbalance	✓	✓	✓	✓	✓	✓	✓	✓
Generator: time-overcurrent (TOC)	✓	✓	✓	✓	✓	✓	✓	✓
Controller								
Discrete raise/lower: n/f & P	✓		✓ #3					
Discrete raise/lower: U & Q	✓		✓ #3		✓		✓	
Analog raise/lower: n/f & P (+/-3 Vdc)		✓	✓ #3	✓	✓	✓	✓	✓
Analog raise/lower: U & Q (+/-5 Vdc)		✓	✓ #3	✓		✓		✓
PWM raise/lower: n/f & P			✓ #3					
Mains import/export power	✓	✓	✓	✓	✓	✓	✓	✓
Load-dependent start/stop	✓	✓	✓	✓	✓	✓	✓	✓
Active power setpoint value: 0/4..20 mA			✓	✓			✓	✓
Load/var sharing	✓	✓	✓	✓	✓	✓	✓	✓
I/O's								
Magnetic/switching Pickup	✓	✓	✓	✓	✓	✓	✓	✓
Discrete alarm inputs (configurable)	16	16	16	16	16	16	16	16
Relay outputs (configurable)	7	7	7	7	7	7	7	7
Analog inputs (configurable)			3 #4	6 #5			6 #5	6 #5
Analog outputs 0/4..20 mA (configurable)			2	2			2	2
CAN bus communication #6	✓	✓	✓	✓	✓	✓	✓	✓
LS 4 - Circuit Breaker Control #7			✓					
Listings/Approvals								
UL/cUL listed	✓	✓	✓	✓	✓	✓	✓	✓

#1 In isolated parallel operation with min. 2 gensets in parallel

#2 Cable incl. software necessary (DPC)

#3 +/-20 mA and +/-10 Vdc and PWM signal (type and range configurable); bias setpoint via relay manager

#4 [T2]..[T3] = 0/4..20 mA
[T4] = Pt100

#5 [T2]..[T3] = 0/4..20 mA
[T4]/[T5] = Pt100
[T6] = VDO, 0..180 Ohm
[T7] = VDO, 0..380 Ohm

#6 Remote monitoring, control, configuration (GW 4 could be used for several interfaces)

#7 External unit

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

© Woodward Governor Company, 2003
 All Rights Reserved

03240B - 03/1/S

For more information contact: