



Feature

These cables are applied for the control circuit of 600 V or less

CONSTRUCTION

Conductor

Circular stranded or circular compressive stranded annealed copper conductor.

Insulation

Extruded colored PVC, Polyethylene or cross-link XLPE, capable for the operating continuously maximum temperature of the cable.

Outer Sheath

Extruded Black PVC or Black Polyethylene, suitable for the operating temperature of the cable.

Identification of cores

On request with cores in different colors or numbering code figures

Copper Screened

Annealed copper tape applied helically overlap before outer sheath for CVVS.


Specification : JIS C 3401 - 1987

JCS 258 C (for CVVS)

(Other Specifications are available upon request)

Type Designation

Example : C V V S

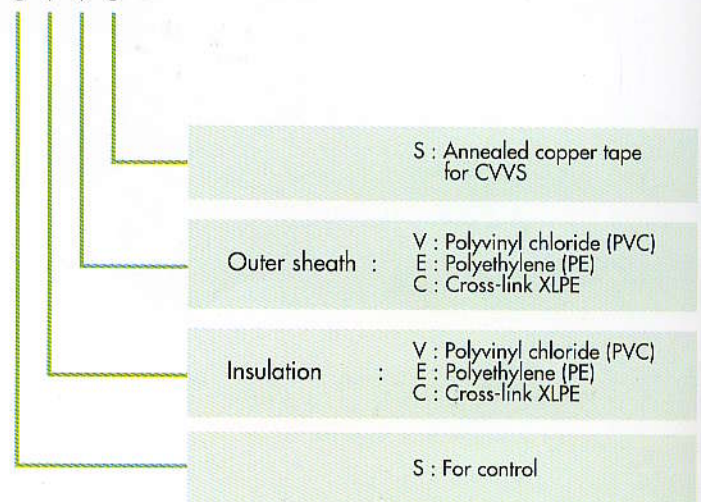

- Type** :
- CVV
 - CEV
 - CEE
 - CCV
 - CCE
 - CVVS